RevNo	Revision note	Date	Signature	Checked

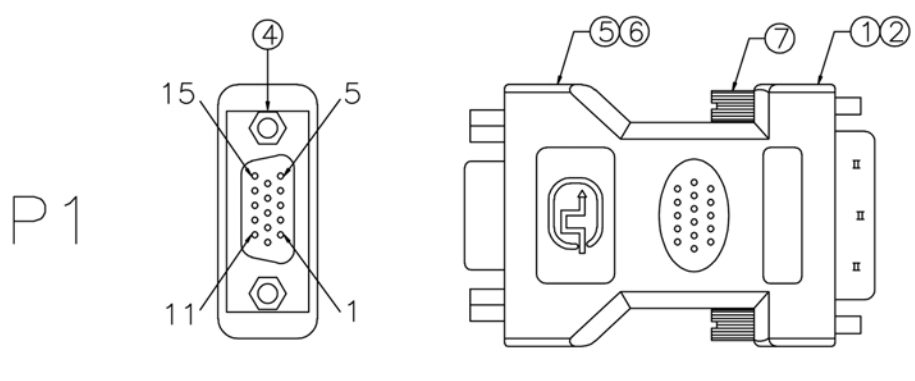

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

PIN OUT

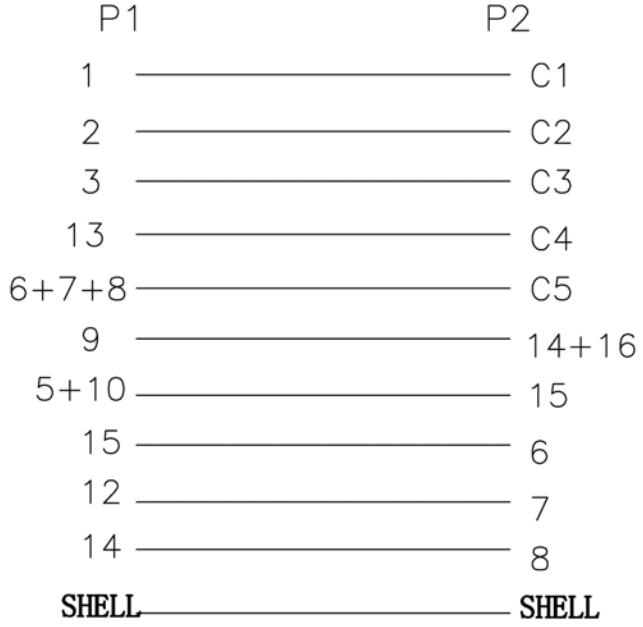

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
⑦	SCREW	#4-40 5*22.5MM	2	PCS
⑥	OUTER MOLDED	BLACK 45P PVC	26	G
⑤	INTER MOLDED	LDPE	8.2	G
④	CONNECTOR	HDB15PIN/F,BLUE INSULATOR,HEX-NUT,NICKEL PLATDE	1	PCS
③	CONNECTOR	DVI 12+5/M BLACK INSULATOR,NICKEL PLATDE	1	PCS
②	WIRE	UL1007 L=55MM	0.055	M
①	WIRE	UL1007 L=45MM*11PCS	0.495	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by		Checked by	Approved by - date MARCH 4.2012	File name DVI12+5/M-HDB15/F	Date MARCH 4.2012	Scale FREE
		26-1650				
		26-1650			Edition 1	Sheet 1/1